

DH-HAC-HDBW1100R-VF

1Megapixel 720P Vandal-proof IR HDCVI Dome Camera



Features

- 1/2.9" 1Megapixel CMOS
- 25/30fps@720P
- High speed, long distance real-time transmission
- Day/Night(ICR), AWB, AGC, BLC, 2D-DNR
- 2.7~12mm vari-focal lens
- Max. IR LEDs length 30m, Smart IR
- IP66, IK10, DC12V

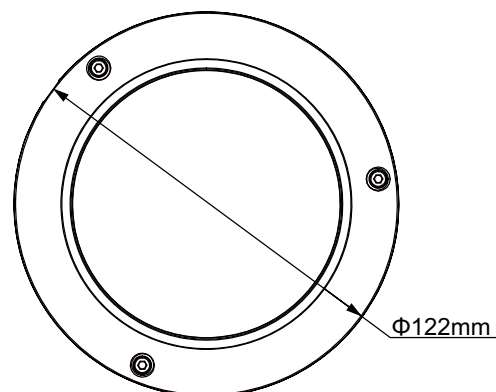
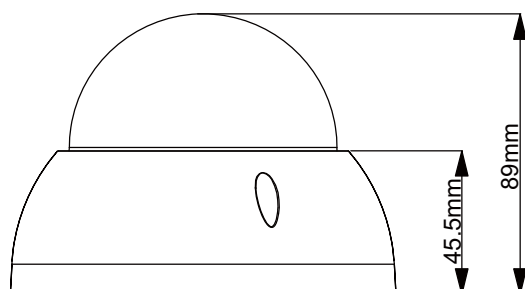
DH-HAC-HDBW1100R-VF

Technical Specifications





Model	DH-HAC-HDBW1100RP-VF		DH-HAC-HDBW1100RN-VF
Camera			
Image Sensor	1/2.9" 1Megapixel CMOS		
Effective Pixels	1280(H)×720(V)		
Electronic Shutter	1/50s~1/100,000s	1/60s~1/100,000s	
Video Frame Rate	25fps@720P	30fps@720P	
Synchronization	Internal		
Min. Illumination	0.01Lux@F1.2(AGC ON), 0Lux IR on		
Video Output	1-channel BNC HDCVI high definition video output		
Camera Features			
Max. IR LEDs Length	30m, Smart IR		
Day/Night	Auto(ICR) / Color / B/W		
Noise Reduction	2D		
Lens			
Focal Length	2.7~12mm		
Angle of View	H: 105.5° ~32.9°		
Lens Type	Manual / Fixed Iris		
Mount Type	Φ14		
General			
Power Supply	DC12V±10%		
Power Consumption	Max 3.2W		
Working Environment	-30°C~+60°C / Less than 95%RH (no condensation)		
Transmission Distance	Over 500m via 75-3 coaxial cable		
Ingress Protection	IP66 & IK10		
Dimensions	Φ122mm×89mm		
Weight	0.45kg		

DH-HAC-HDBW1100R-VF

Dimensions (mm)



Accessories (optional)

			
PFA123	PFA151	PFA152	PFB200W

Dahua Technology Co., Ltd.

1199 BinAn Road, Binjiang District, Hangzhou, China

Tel: +86-571-87688883

Fax: +86-571-87688815

Email: overseas@dahuatech.com

www.dahuasecurity.com

*Design and specifications are subject to change without notice.

© 2014 Dahua Technology